





Conference phones for every situation	



Plug the Konftel 200W in the mains  
using the power adapter as illustrated.  
Place the conference phone in the  
middle of the table.

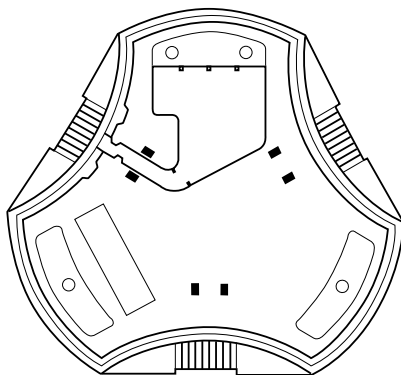

OK ↻




OK ↻



0-9...

0-9...

OK ↻

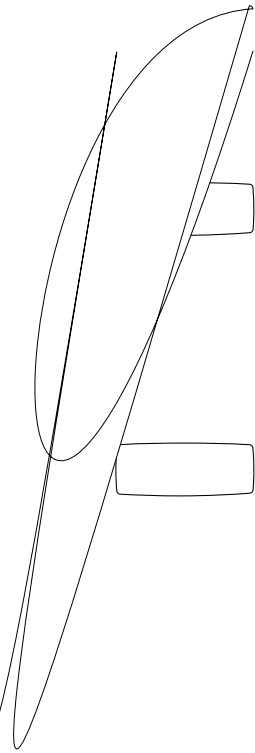

OK ↻




OK ↻



## REGISTERING IN A DECT BASE STATION

You need to register your Konftel 200W in a DECT base station before it can be used. Here we explain how to register in a **Konftel DECT base station**. To register your Konftel 200W in other makes of base station, simply follow the same procedure. Please refer to your base station instruction manual or contact your company's switchboard administrator if you are unsure.





























### Set Konftel DECT base station in registration mode

⇒ Press and hold the key/LED on the base station until it starts to flash.

The base station is now in registration mode. Once registration has been completed, the LED will stop flashing. If the base station does not identify a DECT phone within 2 minutes, the registration mode will switch off automatically.

### Register Konftel 200W in a DECT base station

		⇒ Press the <b>MENU</b> key.
		⇒ Select the menu tool using the <b>Up/down</b> key.
		⇒ Press <b>OK</b> .
		⇒ Select the menu <b>Reg</b> using the <b>Up/down</b> key.
		⇒ Press <b>OK</b> .
		⇒ Select a base (1–4).
		If no base station has been programmed, choose no. 1. Numbers that are ticked are being used.
		⇒ Press <b>OK</b> .
		⇒ Select a DECT system.
		⇒ Press <b>OK</b> .
		⇒ Enter the security code (PIN code) (standard code is 0000).
		⇒ Press <b>OK</b> .
		Some DECT systems (not Konftel DECT Base Station) require a PARK code. Check with your company's switchboard supplier.
		⇒ Enter the PARK code if this is required. Otherwise, leave blank.
		⇒ Press <b>OK</b> .
		Your Konftel 200W is now in registration mode and is searching for a base station in registration mode. Wait until you receive confirmation that registration has been completed. Registration can be interrupted by pressing <b>C</b> . If registration was successful, the word <b>Done</b> will appear in the display.
		⇒ Press <b>OK</b> .
		The Konftel 200W is now ready to use.

Konftel is a leading company within loudspeaker communication and audio technology. We develop and sell products and technology for telephone conferences based on cutting-edge expertise within acoustics and digital signal processing. Characteristic of our products is that all conference telephones contain the same high quality audio technology – OmniSound® providing crystal clear sound. Read more about Konftel and our products on [www.konftel.com](http://www.konftel.com).

Developed by Konftel AB  
Box 268, SE-901 06 Umeå, Sweden  
Phone: +46 90 706 489 Fax: +46 90 131 435  
E-mail: [info@konftel.com](mailto:info@konftel.com) Web: [www.konftel.com](http://www.konftel.com)

---

---